

Operator's Manual



<u>Model</u>	<u>PSI</u>	<u>GPM</u>	<u>H.P. / PHASE</u>	<u>Fuel type</u>	<u>Weight (lb)</u>
☐ 1000STLE	1000	2.0	2.0/1	For all:	400
☐ 1000STNE	1000	2.0	2.0/1		400
☐ 1500STLE	1500	3.0	3.0/1	L.P.,	400
☐ 1500STNE	1500	3.0	3.0/1		400
☐ 2000STLE	2000	4.0	5.0/1-3	or	570
☐ 2000STNE	2000	4.0	5.0/1-3		570
☐ 2555STLE	2500	5.5	10.0/1-3		625
☐ 2555STNE	2500	5.5	10.0/1-3	Natural Gas	625
☐ 3000STLE	3000	4.0	7.5/1-3		600
☐ 3000STNE	3000	4.0	7.5/1-3		600
☐ 2000TRLE	2000	4.0	5.0/1-3		570
☐ 2000TRNE	2000	4.0	5.0/1-3		570
☐ 3000TRLE	3000	4.0	7.5/1-3	For all:	600
☐ 3000TRNE	3000	4.0	7.5/1-3		600
☐ 2545STATLE	2500	4.5	5.0/1-3	L.P.,	800
☐ 2545STATNE	2500	4.5	5.0/1-3		800
☐ 2555STATLE	2500	5.5	10.0/1-3	or	800
☐ 2555STATNE	2500	5.5	10.0/1-3		800
☐ 3040STATLE	3000	4.0	7.5/1-3		800
☐ 3040STATNE	3000	4.0	7.5/1-3	Natural Gas	800
☐ 208STATLE	2000	8.0	10.0/1-3		800
☐ 208STATNE	2000	8.0	10.0/1-3		800

Cam Spray Hot Water Models

L.P. & Natural Gas fired hot water pressure washers

Version 04.03



Working well under pressure!

Cam Spray
520 Brooks Road
Iowa Falls, IA 50126

toll free: 1.800.648.6007
fax: 1.641.648.5013
e-mail: camspray@camspray.com



WARNING

The following warnings must be followed. Failure to follow these warnings could result in serious personal injury or death!

Never allow children or untrained personnel to operate machinery.

Gun kicks back--hold with both hands.



Electrical equipment can cause shock and sparks.

Do not bypass or remove the grounding prong in any electrical plug.

Keep electrical plugs, connections, and cords out of water and moisture.

Disconnect from power source before servicing.

Inspect and repair damaged or exposed electrical components prior to use.

Never splice electrical cords on pressure washers.

Be sure electrical service is adequately sized for the equipment.



Exhaust fumes contain harmful gasses.

Exhaust gasses can cause death or serious injury.

Use only in well ventilated areas or vent the exhaust to the outside.




High pressure water can cause death or serious injury.

Warning--high temperature water.

Wear protective clothing and face shield.

Do not direct water stream toward self or others.

All hoses should be secured in the lines to be cleaned at least five feet.



Pressurized fluid streams and ruptured pressure vessels can cause death or serious injury.


High pressure fluid can create a high pressure stream or ruptured vessel.

Wear a safety face shield.

Relieve pressure before servicing.

Do not modify, repair, or rework vessel or change safety relief or pressure setting.

Do not direct stream toward self or others.



Fire can cause death or serious injury.

Fuel will burn when ignited.


Wear face shield and protective clothing.

Do not expose fuel to flames, sparks, or other sources of ignition.


Use in well ventilated area or vent to outside area.


Save these instructions

ST SERIES

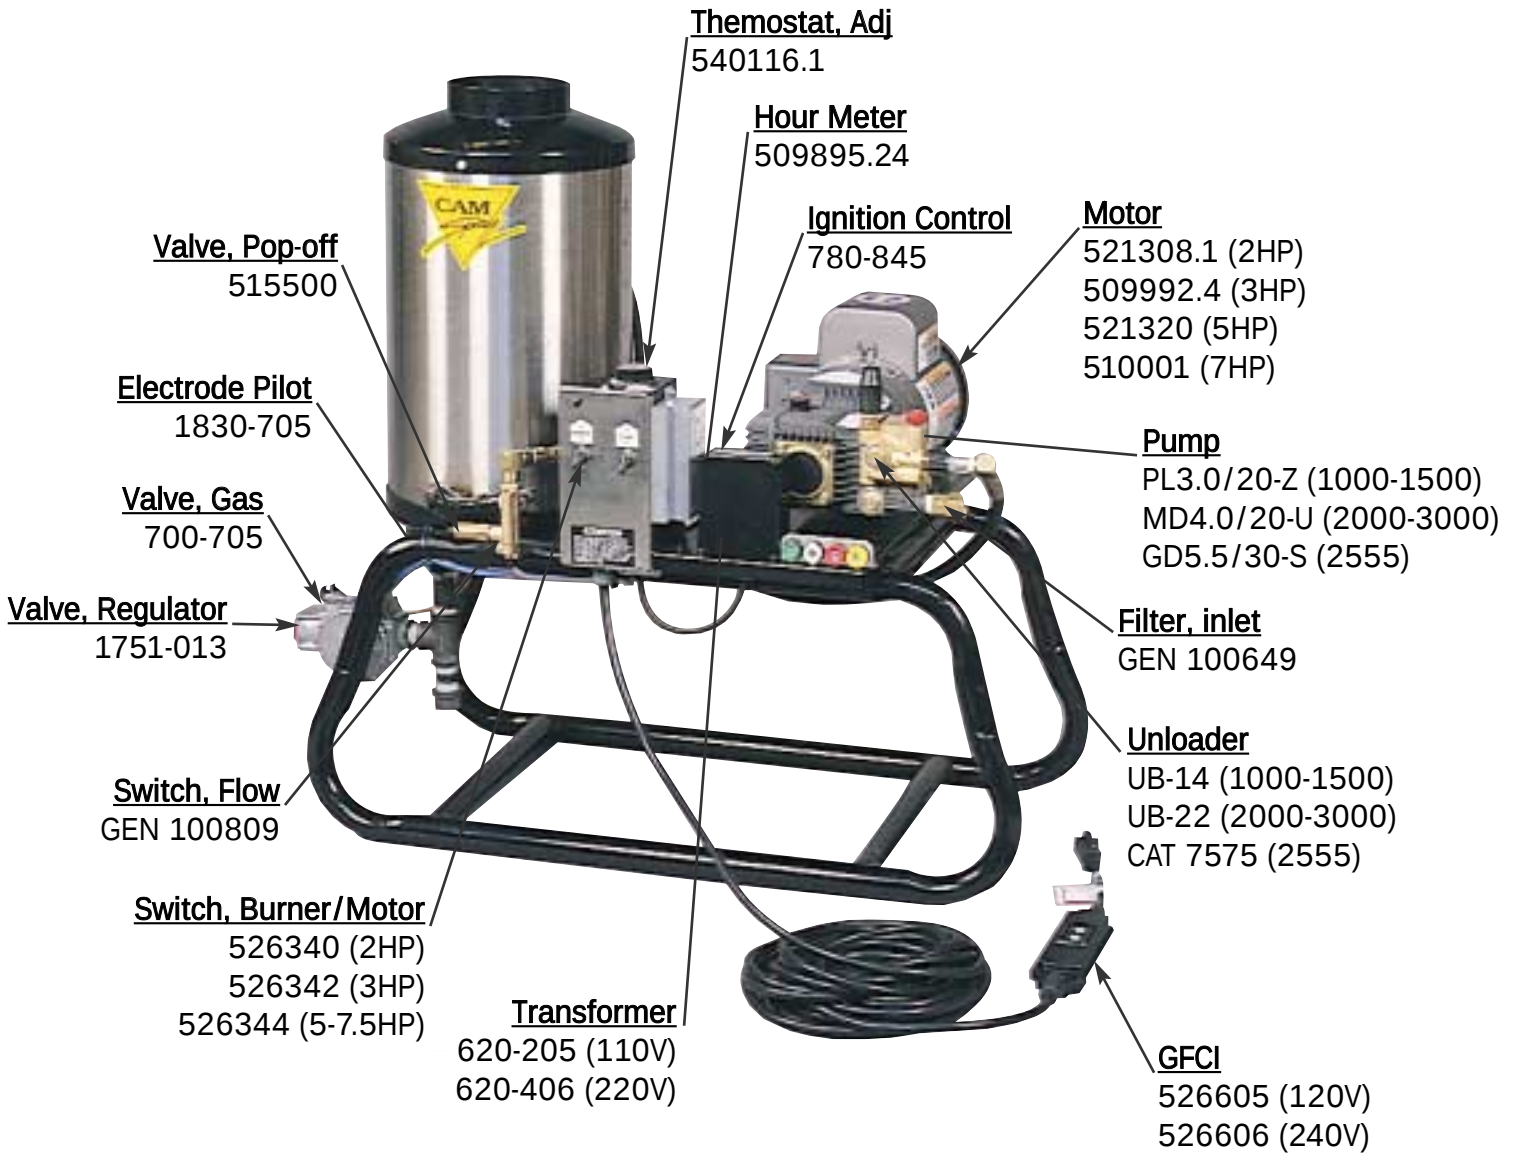

STAT SERIES

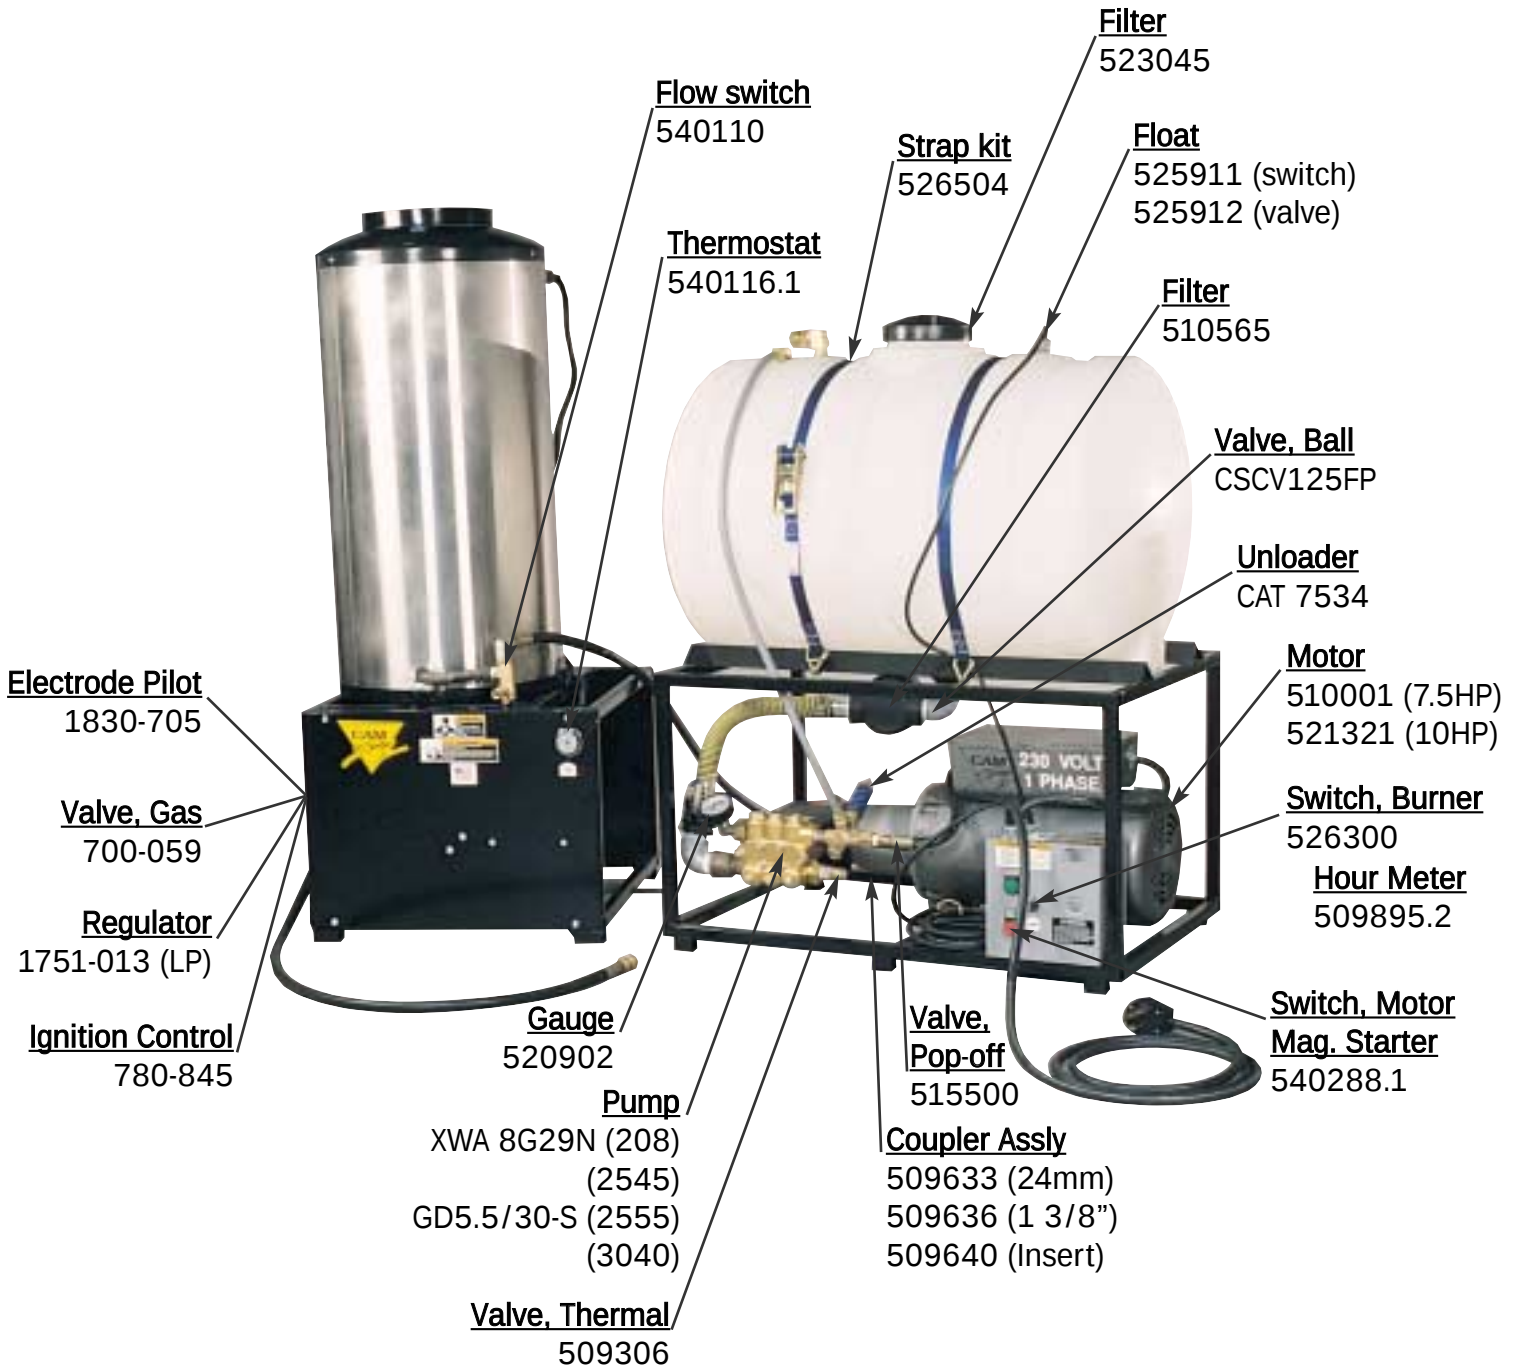

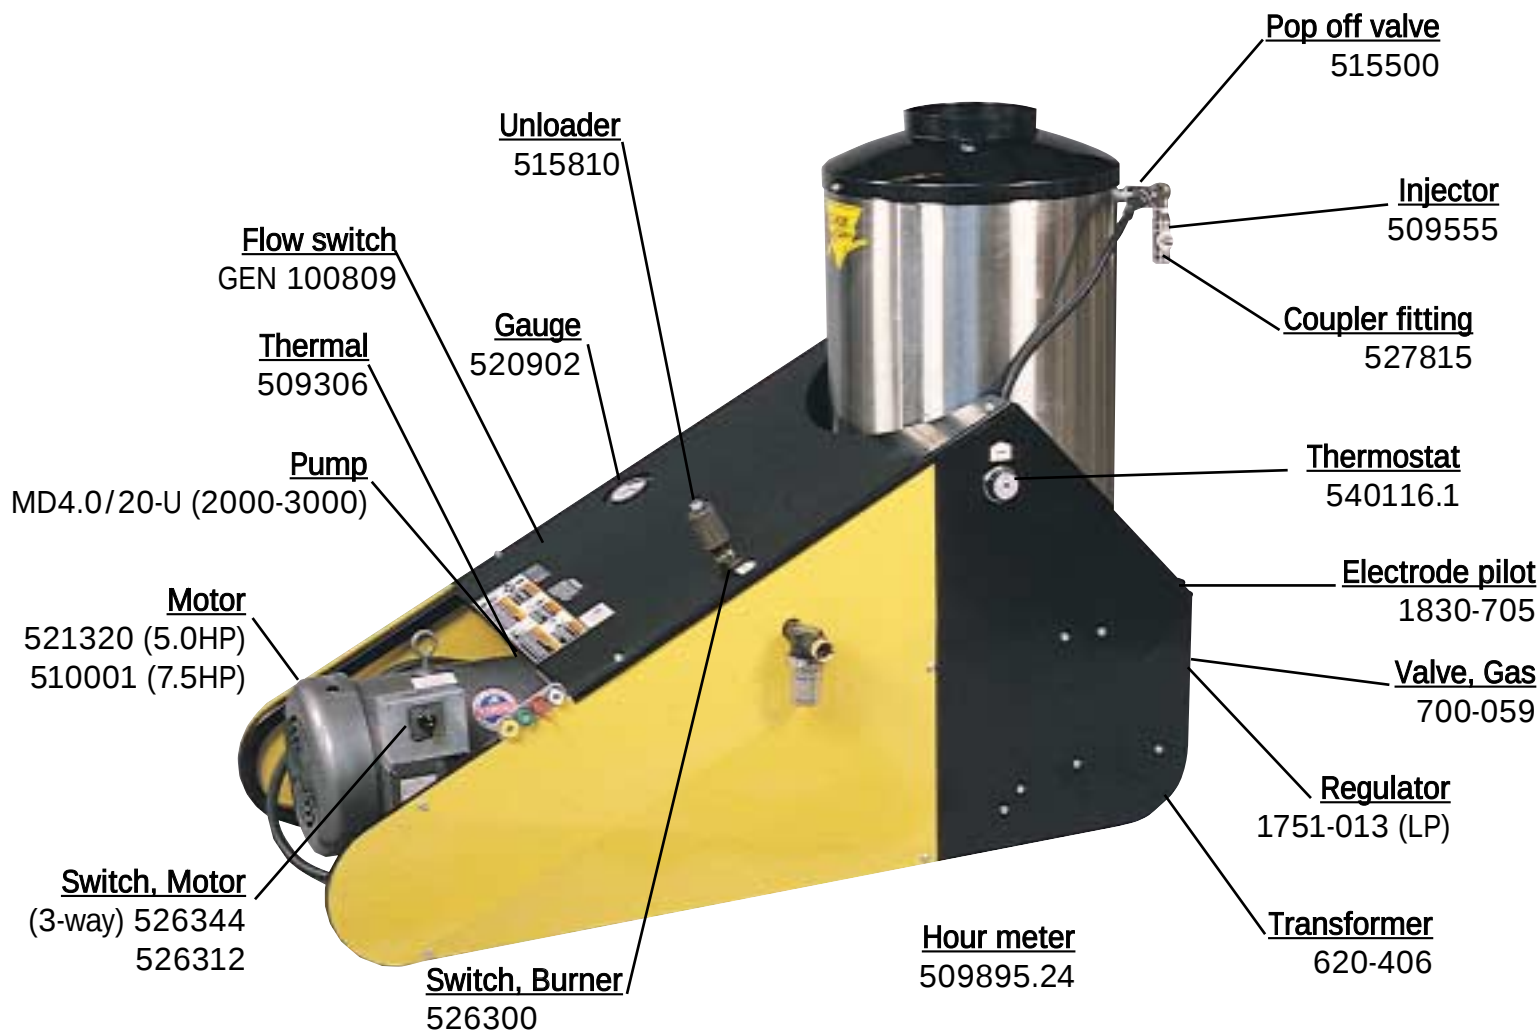

Gun/Wand breakdown



<u>Part no.</u>	<u>Description</u>
AR AL200	Gun section of wand
542002	Dual wand 1/2
510100	O-ring for Quick coupler and Twist-fast sockets
510065	Quick coupler socket 1/4"
527800	Twist fast socket 1/4" x 22mm

Replacement tips for all units

<u>Tip color</u>	<u>Tip description</u>
Red	0 deg. Q meg
Yellow	15 deg. Q meg
Green	25 deg. Q meg
White	40 deg. Q meg
Soap	4030 1/4 meg



Replacement Hoses

<u>Part no.</u>	<u>Description</u>
509073	20' x 3/8"
509074	30' x 3/8"
509080	40' x 3/8"
509085	50' x 3/8"
509081	100' x 3/8"



Hose Extensions (with coupler ends)

<u>Part no.</u>	<u>Description</u>
527650	20' x 3/8"
527651	40' x 3/8"
527653	50' x 3/8"
527660	100' x 3/8"